

DUX-Basic

Modern technical projects require control units with adequate detail solutions which are important for the overall success. The DUX-Basic series combine high-grade quality with perfect design. The control units feature the front bezel in mat or polished metal as well as black or charcoal plastics.

The many colour combinations make individual control panels possible. The position indicator is applied on the front ring of the key and selector switches, thus, saves the external nameplate holder.

Control units of the DUX-Basic series are manually operated electrical components to fit a mounting diameter of 22.3 mm. They serve to switch auxiliary circuits and are used in the machine building industry, ship and rail vehicle building, in lifting gear and many other branches of electro-technology.



pushbuttons with marking option key switches with illuminating option toggle switches selector switches with illuminating option emergency stops



DESIGNPREIS
2006

NOMINIERT



Dux[®]
by SCHLEGEL



The DUX-Basic series fit the following contact blocks:


Modular contact system

Screw connections
Finger-protected acc. to VBG4
Type series **MT...**



Technical Data:

acc. to IEC/EN 60947-5-1
AC15, DC13
acc. to IEC/EN 61058-1
250V~ / 440V~
16(10)A / 10(6)A
Lamp socket: BA9s
Lamp output: max. 2W / 250V

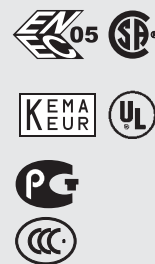

Modular contact system

Cage-Clamp* technology
Finger-protected acc. to VBG4
Type series **DT...**



acc. to IEC/EN 61058-1
250V~ / 400V~
16(10)A / 10(5)A
Lamp socket: BA9s
Lamp output: max. 2W / 250V



Modular contact system

Cage-Clamp* quick connection system
Finger-protected acc. to VBG4
Type series **DS...**



acc. to IEC/EN 61058-1
250V~ / 400V~
16(10)A / 10(5)A
Lamp socket: BA9s
Lamp output: max. 2W / 250V



Standard contact blocks

Screw connections
Finger-protected acc. to VBG4
Type series **ET...**




acc. to IEC/EN 60947-5-1
AC15, DC13
acc. to IEC/EN 61058-1
250V~ / 440V~
10(6)A / 6(3)A
Lamp socket: BA9s
Lamp output: max. 2W / 250V



*) CAGE CLAMP is a registered Trademark of WAGO Kontakttechnik GmbH Germany

Mounting depth dimensions

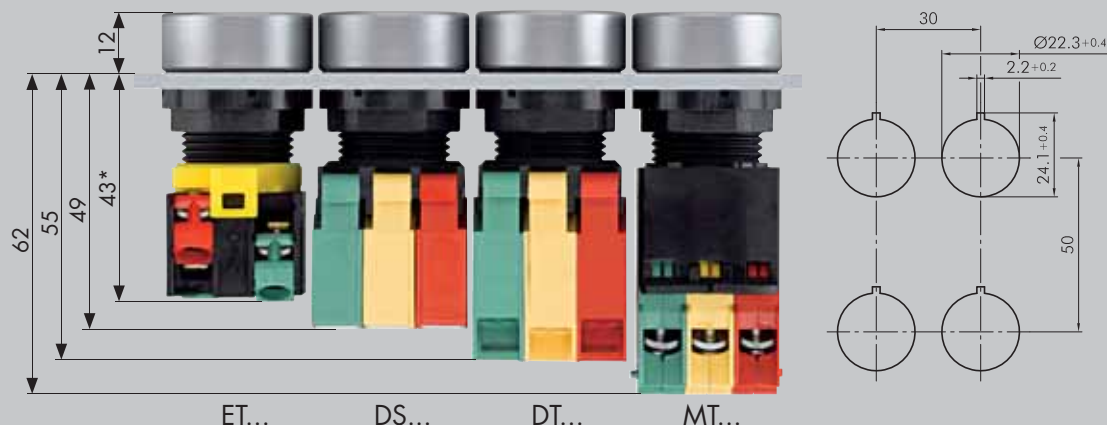

*) illuminated pushbutton 50 mm

DUX Schaltgeräte GmbH
Schönbachstr. 93
D-04299 Leipzig

Phone.: +49 (0) 341 / 8 68 72-0
Fax: +49 (0) 341 / 8 68 72-33
info@dux.de
www.dux.de

