

# KOMBITAST-R

Due to their size - fitting a mounting diameter of 30 mm - the actuators of the KOMBITAST-R series are particularly suitable for robust applications. Although, with their low height and conical shape they come across less bulky than other actuators of the same diameter.

The actuators feature large operating interfaces and clearly tactile switching operations.

The KOMBITAST-R series has been awarded the iF Design Award.

Degree of protection: IP65

Protection class: II



pushbuttons with  
illuminating and  
marking option



toggle switches



selector switches



key switches



emergency stops



The KOMBITAST-R series fits the following contact blocks:

Modular contact system  
Screw connections  
Finger-protected acc. to VBG4  
Type series **MT...**



**Technical Data:**

acc. to IEC/EN 60947-5-1  
AC15, DC13  
acc. to IEC/EN 61058-1  
250V~ / 440V~  
16(10)A / 10(6)A  
Lamp socket: BA9s  
Lamp output: max. 2W / 250V



Modular contact system  
Cage-Clamp\* technology  
Finger-protected acc. to VBG4  
Type series **DT...**



acc. to IEC/EN 61058-1  
400V~ / 250V~  
10(5)A / 16(10)A  
Lamp socket: BA9s  
Lamp output: max. 2W / 250V



Modular contact system  
Cage-Clamp\* fast connection system  
Finger-protected acc. to VBG4  
Type series **DS...**



acc. to IEC/EN 61058-1  
250V~ / 400V~  
16(10)A / 10(5)A  
Lamp socket: BA9s  
Lamp output: max. 2W / 250V



Standard contact blocks  
Screw connections  
Finger-protected acc. to VBG4  
Type series **ET...**




acc. to IEC/EN 60947-5-1  
AC15, DC13  
acc. to IEC/EN 61058-1  
250V~ / 440V~  
10(6)A / 6(3)A  
Lamp socket: BA9s  
Lamp output: max. 2W / 250V



\*) CAGE CLAMP is a registered Trademark of WAGO Kontakttechnik GmbH Germany

Mounting depth dimensions

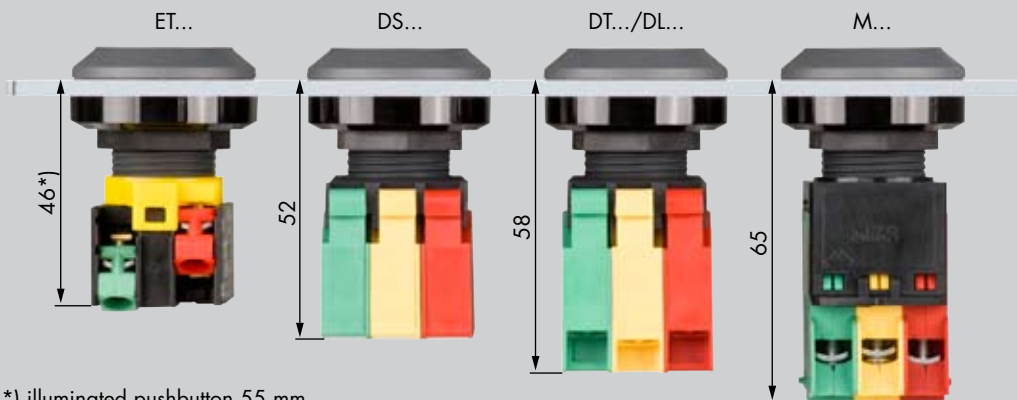

\*) illuminated pushbutton 55 mm

