

QUARTEX-R

The robust control units of the QUARTEX-R series feature large operating interfaces and clearly tactile switching operations. Their square shape allows side by side assembly while the bevelled outer edges and the round keys make them appearing that stylish and flat. It's just the interplay of outer square shape and round control elements forming the distinctive design feature of this range. Another highlight are the colour rings around the control elements.

Degree of protection: IP65
Protection class : II



illuminated push-
buttons with
marking option

toggle switches

selector switches

key switches

emergency stops



design award
winner
2004



Designpreis der
Bundesrepublik
Deutschland

Nominiert 2004



The QUARTEX-R series fits the following contact blocks:

Modular contact system
Screw connections
Finger-protected acc. to VBG4
Type series **MT...**



Technical Data:

acc. to IEC/EN 60947-5-1
AC15, DC13
acc. to IEC/EN 61058-1
250V~ / 440V~
16(10)A / 10(6)A
Lamp socket: BA9s
Lamp output: max. 2W / 250V



Modular contact system
Cage-Clamp* technology
Finger-protected acc. to VBG4
Type series **DT...**



acc. IEC/EN 61058-1
400V~ / 250V~
10(5)A / 16(10)A
Lamp socket: BA9s
Lamp output: max. 2W / 250V



Modular contact system
Cage-Clamp* fast connection system
Finger-protected acc. to VBG4
Type series **DS...**



acc. to IEC/EN 61058-1
250V~ / 400V~
16(10)A / 10(5)A
Lamp socket: BA9s
Lamp output: max. 2W / 250V



Standard contact blocks
Screw connections
Finger-protected acc. to VBG4
Type series **ET...**




acc. to IEC/EN 60947-5-1
AC15, DC13
acc. to IEC/EN 61058-1
250V~ / 440V~
10(6)A / 6(3)A
Lamp socket: BA9s
Lamp output: max. 2W / 250V



*) CAGE CLAMP is a registered Trademark of WAGO Kontakttechnik GmbH Germany

Mounting depth dimensions

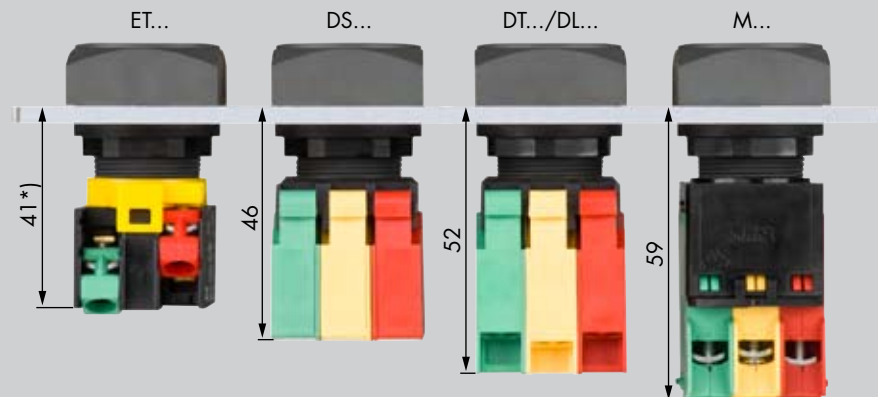

*) illuminated pushbutton 50 mm

