

QUARTRON

The Quartron series combine attractive actuators with optimum exploitation of panel surface, smallest space requirement, toughness to all kinds of machines and utmost ease of assembly.

Degree of protection: IP65
Protection class: II



rectangular model

Extract of the QUARTRON product range



pushbuttons with
illuminating and
labelling option



key actuators




toggle heads



selector heads



emergency
stops

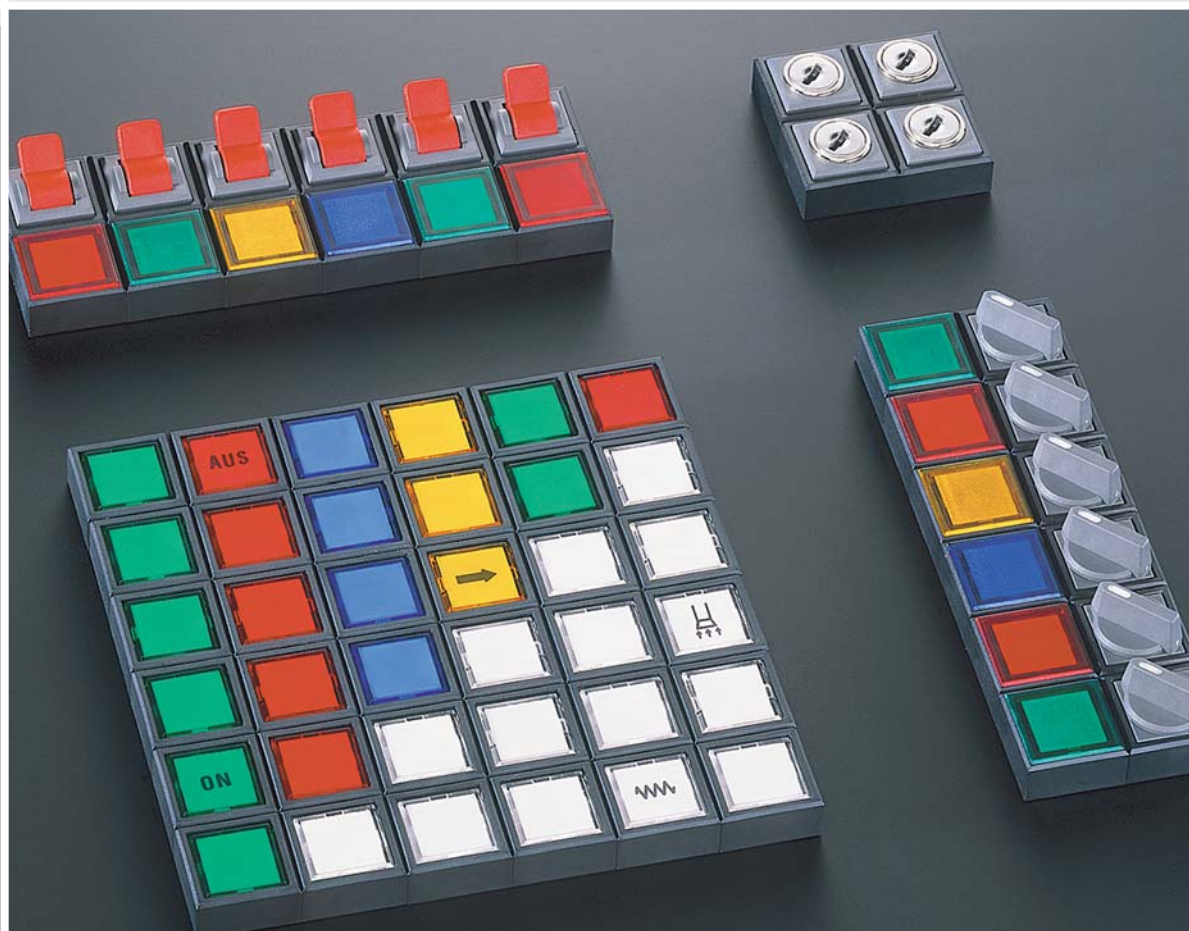

QUARTRON


The QUARTRON actuators fit the following contact blocks:

Standard contact blocks
Faston terminals 2.8 x 0.8 mm
Type series A...



Technical Data:

acc.to VDE 0660 Ui~250V, Ith 6A
acc.to VDE 0630
IEC/EN 61058
250V AC 6 (4) A
Lamp voltage: 60V
Lamp socket: T5,5K
Lamp output: 1.2W max.

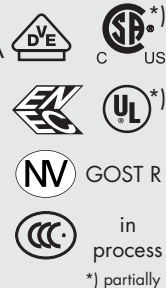

Electronic contact units
with snap action

PCB-mount terminals
Type series CTP...



Rated voltage: 20mV...48V AC/DC
(non-inductive)
max. current: 0.1A
min. current: 0.01mA
Lamp voltage: 60V
Lamp socket: T5,5K
Lamp output: 1.2W max.



Electronic contact units
with snap action and up to two
inverters

Faston terminals 2.8 x 0.8 mm
Type series CT...

PCB-mount terminals
Type series CZ... (approvals on request)



Rated voltage: 20mV...48V AC/DC
(non-inductive)
max. current: 0.1A
min. current: 0.01mA
Lamp voltage: 60V
Lamp socket: T5,5K
Lamp output: 1.2W max.



Mounting depth dimensions

