

RONDEX

The robust control units of the RONDEX series feature large operating interfaces and clearly tactile switching operations. The minimalist round and slightly tapered housing ensures a timeless, attractive appearance. The option to mount the units side by side, a great variety of accessories, such as e.g. external nameplate holders, and appropriate emergency stops enable to design sophisticated control panels with optimal use of space. This series has been granted national and international design awards.

Degree of protection: IP65
Protection class : II



pushbuttons with
illuminating and
marking option



toggle heads




selector heads



key actuators



emergency stops



The RONDEX series fits the following contact blocks:

Modular contact system

Screw connections

Finger-protected acc. to VBG4

Type series **MT...**



Technical Data:

acc. to IEC/EN 60947-5-1

AC15, DC13

acc. to IEC/EN 61058-1

250V~ / 440V~

16(10)A / 10(6)A

Lamp socket: BA9s

Lamp output: max. 2W / 250V



Modular contact system

Cage-Clamp* technology

Finger-protected acc. to VBG4

Type series **DT...**



acc. to IEC/EN 61058-1

400V~ / 250V~

10(5)A / 16(10)A

Lamp socket: BA9s

Lamp output: max. 2W / 250V



Modular contact system

Cage-Clamp* fast connection system

Finger-protected acc. to VBG4

Type series **DS...**



acc. to IEC/EN 61058-1

250V~ / 400V~

16(10)A / 10(5)A

Lamp socket: BA9s

Lamp output: max. 2W / 250V



Standard contact blocks

Screw connections

Finger-protected acc. to VBG4

Type series **ET...**



acc. to IEC/EN 60947-5-1

AC15, DC13

acc. to IEC/EN 61058-1

250V~ / 440V~

10(6)A / 6(3)A


Lamp socket: BA9s

Lamp output: max. 2W / 250V



*) CAGE CLAMP is a registered Trademark of WAGO Kontakttechnik GmbH Germany

Mounting depth dimensions

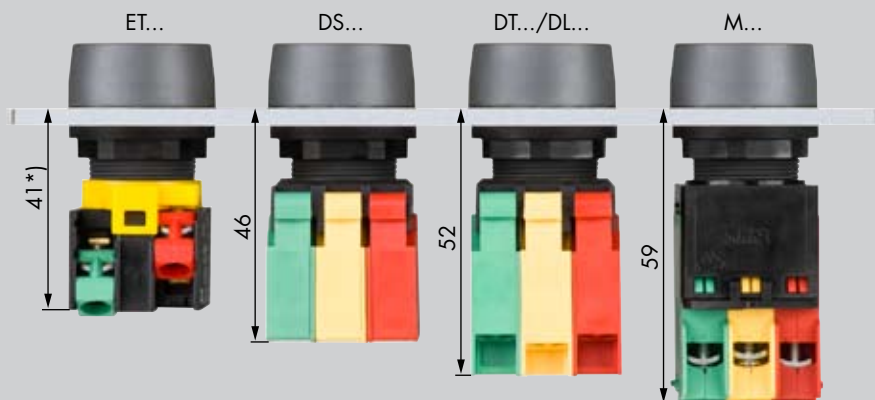

*) illuminated pushbutton 50 mm

