

IEC Connectors & NEMA Receptacles



10A 250V ac



UL CSA 10A 250V ac UL 65°C

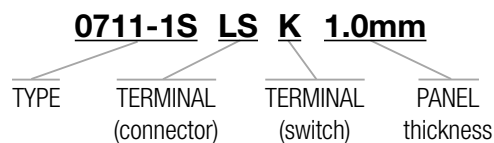
RoHS

RoHS compliant

To order:

State type number, connector terminal code, switch terminal code (if applicable), and for snap-in items, the panel thickness. Stocked items are for 1.0mm panels.

- ▶ Ratings up to 10A, 250V ac
- ▶ IEC 320 Inlets & outlets
- ▶ NEMA outlets
- ▶ Fused and non fused
- ▶ Flange and snap to panel fixing



TYPE	TERMINAL	DIMENSIONS (mm)	View below is at Y
0707-1-C (2k min order) Inlet	S 2.5 Solder N 4.0 Solder Q 4.8 Tab W 6.3 Tab	 15A 250Vac 10A 250Vac	
0708-1-C Outlet	N 4.0 Solder Q 4.8 Tab W 6.3 Tab P PCB	 15A 250Vac 10A 250Vac	
0709-P Outlet	L 4.0 Solder Q 4.8 Tab	Panel X thickness 0.8 24.0 1.0 24.6 1.2 25.2 1.6 26.2 15A 250Vac	
0710-P Outlet	V12 Solid Wire V16 Solid Wire	Panel X thickness 0.8 - 1.2 24.6 1.3 - 2.0 24.8 15A 250Vac	
0711-P (2k min order) Inlet	S 2.5 Solder N 4.0 Solder Q 4.8 Tab W 6.3 Tab	Rating/approval details on request Panel X thickness 0.8 - 1.2 20.3 1.3 - 2.0 20.5 15A 250Vac 10A 250Vac	

IEC Connectors & NEMA Receptacles

0717-1S Q T 1.0mm

TYPE TERMINAL (connector) TERMINAL (switch) PANEL thickness

- ▶ Ratings up to 10A, 250V ac
- ▶ IEC 320 Inlets & outlets
- ▶ Fused and non fused
- ▶ Flange and snap to panel fixing


10A 250V ac

UL CSA 10A 250V ac UL 65°C


RoHS compliant

To order:
State type number, connector terminal code, switch terminal code (if applicable), and for snap-in items, the panel thickness. Stocked items are for 1.0mm panels.

TYPE	TERMINAL
0717-1-P  Fused Inlet 5x20	S 2.5 Solder LS 2.8 Solder Q 4.8 Tab W 6.3 Tab
0717-1S State "Non Lit"  Switched Fused Inlet 5x20	Q 4.8 Solder Connector T 4.8 Solder Switch
0717-1S State "Lit"  Switched Fused Inlet 5x20	Q 4.8 Solder Connector T 4.8 Solder Switch
0717-C  Fused Inlet 5x20	S 2.5 Solder LS 2.8 Solder Q 4.8 Tab W 6.3 Tab
0717-2-C (2k min order)  Double Fused Inlet 5x20	S 2.5 Solder LS 2.8 Solder Q 4.8 Tab W 6.3 Tab
0717-2-P (2k min order)  Double Fused Inlet 5x20	S 2.5 Solder LS 2.8 Solder Q 4.8 Tab W 6.3 Tab

DIMENSIONS (mm)

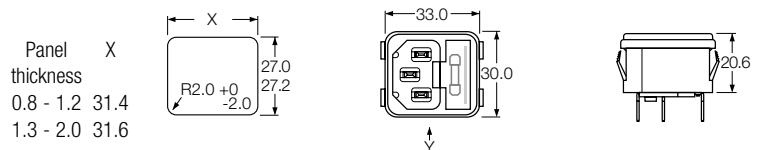
View below is at Y



10A 250Vac

DP non-illuminated switch is standard

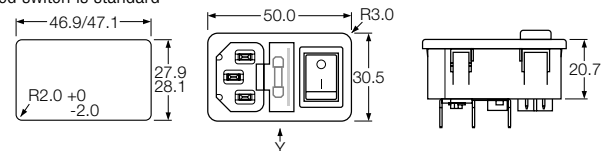
Panel thickness:
0.8 or 1.0 or 1.2
Call factory
for details




10A 250Vac

DP illuminated switch is standard

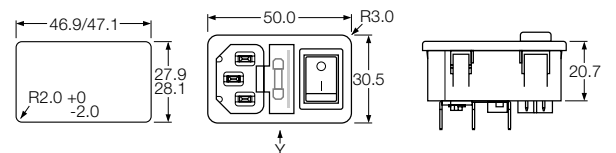Panel thickness:
0.8 or 1.0 or 1.2
Call factory
for details




10A 250Vac




10A 250Vac

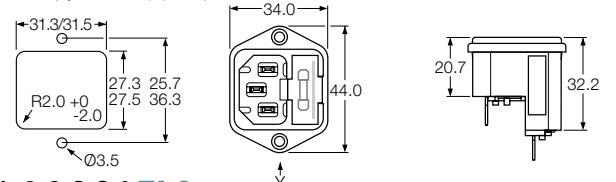0717-2-C For applications (eg medical equipment) where both live & neutral feeds must be fused











10A 250Vac

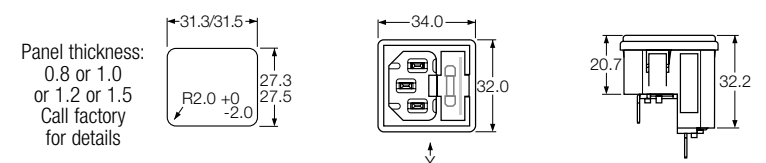0717-2-P For applications (eg medical equipment) where both live & neutral feeds must be fused



10A 250Vac








TYPE	TERMINAL	DIMENSIONS (mm)	View below is at Y
0721-P (2k min order)  Inlet	S Solder	Panel thickness 0.8 - 1.3  2.5A 250Vac	 
0722-C (2k min order)  Inlet	Q 4.8 Solder W 6.3 Tab	 20A 125Vac 16A 250Vac	 
0723-C (2k min order)  Outlet	Q 4.8 Solder W 6.3 Tab	 20A 125Vac 16A 250Vac	 

Technical data

Mouldings V2 (V0 option)
 Connectors Tin plated solid brass
 Terminals Silver plated

Terminal dimensions

For Connectors

S	N	Q	W	P	L	LS	V12	V16	Slide	Slide	Rocker
2.5mm Solder	4mm Solder	4.8mm Solder/ Fast on	6.3 Fast on	PCB	Solder	2.8mm Solder	12-14 AWG Solid Wire	16 AWG Solid Wire	T	K	T
											

Note: Designated solder terminals should not be fitted with "Push on", "QD" or "Fast on" type cable connectors