

Fuseholders 5 x 20 mm



- ▶ 5 x 20mm fuses
- ▶ Finger and tool release
- ▶ PC2 protection category
- ▶ Solder & 2.8mm terminals
- ▶ Proud & low profile bezels
- ▶ Snap to panel and screw fixing


6.3A 250Vac (max fuse rating*) T-55 to T+70 (ambient)
Maximum dissipation wattage: 1.5W

6.3A UL 94V2 UL file E92075 CSA file LR44770

RoHS compliant

These products comply with safety category PC2.
 *Users should be aware of the de-rating factors published by specialist manufacturers of fuses.

These fuseholders are fitted with combination (solder / 2.8) mid-body terminals. It has not been possible to show both views here.



M520
Terminal Cover




A0033 00
In-line 5 x 20 fuseholder
Call factory for rating details


▶ TERMINAL	▶ BODY AND CAP	▶ PANEL HOLE
<p>T</p> <p>Solder</p>	<p>0332 Finger release</p> <p></p>	<p>RA</p>
	<p>0333 Tool release</p> <p></p>	
<p>B</p> <p>2.8 x 0.5</p>	<p>0340 Tool release</p> <p></p>	<p>RD</p>
	<p>0341 Tool release</p> <p></p>	

DIMENSIONS (mm)


0332 (T terminal shown)




0333 (T terminal shown)



0340 (T terminal shown)

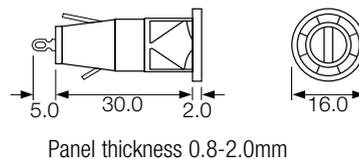

0341 (T terminal shown)

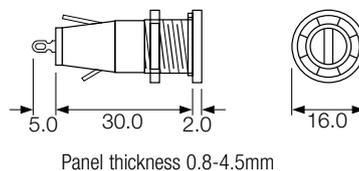

Fuseholders 6.3 x 32mm (1/4" x 1/4")



16A 250Vac (max fuse rating*) T-55 to T+70 (ambient)
Maximum dissipation wattage: 2.5W



16A UL 94V2 UL file E92075 CSA file LR44770




RoHS compliant

These products comply with safety category PC2.
*Users should be aware of the de-rating factors published by specialist manufacturers of fuses.

Fuseholders with in-line termination have combination (4.8/6.3) terminals. It has not been possible to show both views here. Units with right angle terminals have user specified end terminals and combination mid-body terminals.

- ▶ 6.3 x 32mm fuses
- ▶ Tool release
- ▶ PC2 protection category
- ▶ 4.8, 6.3 and solder terminals
- ▶ Low profile bezel
- ▶ Snap to panel and screw fixing



M873
Cover for C & T terminals



A0035 00
In-line 6.3 x 32 (1/4" x 1/4") fuseholder
Call factory for rating details

▶ TERMINAL	▶ BODY AND CAP	▶ PANEL HOLE
<p>C</p> <p>6.3 x 0.8</p>	<p>0345 (C terminal shown)</p> <p>Ⓢ Ⓧ Ⓡ Ⓛ Ⓜ Ⓝ</p>	<p>RA</p> <p>Panel thickness 0.8 - 2.0mm for snap-in 0.8 - 4.5mm for nut fixing</p>
<p>D</p> <p>6.3 x 0.8 Right angle</p>	<p>0345 (D terminal shown)</p> <p>Ⓢ Ⓧ Ⓡ Ⓛ Ⓜ Ⓝ</p>	
<p>T</p> <p>4.8 x 0.8 Solder</p>	<p>0347 (T terminal shown)</p> <p>Ⓢ Ⓧ Ⓡ Ⓛ Ⓜ Ⓝ</p>	
<p>U</p> <p>4.8 x 0.8 Right angle solder</p>	<p>0347 (U terminal shown)</p> <p>Ⓢ Ⓧ Ⓡ Ⓛ Ⓜ Ⓝ</p>	

DIMENSIONS (mm)

